




## Custom Dynamics® 25 Heritage Front Turn Signal Harness Installation Instructions

We thank you for purchasing the Custom Dynamics® 25 Heritage Front Turn Signal Harness. Our products utilize the latest technology and high quality components to ensure you the most reliable service. We offer one of the best warranty programs in the industry and we back our products with excellent customer support, if you have questions before or during installation of this product please call Custom Dynamics® at 1(800) 382-1388.

**Part Numbers:** CD-25HT-FTS-HARN

### **Package Contents:**

- 25 Heritage FTS Harness (2)
- Instructions (1)

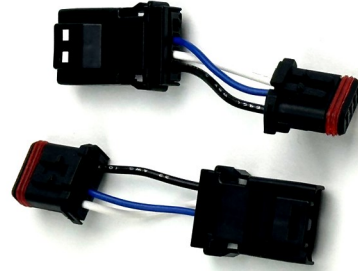

**Fits:** 2025 Harley-Davidson® Softail Heritage Classic (FLHC).

### **Installation:**

1. Remove all necessary parts to disconnect the negative battery cable from the battery.
2. Remove the OEM front turn signal lens and unplug OEM front turn signal.
3. Install 25 Heritage FTS Harness into connector on motorcycle and inline between new Custom Dynamics® ProBEAM® or GEN 4 Front Turn Signals (**sold separately**), and install lens. Repeat on opposite side front turn signal.
4. Reconnect the negative battery cable to the battery and reinstall all necessary parts.
5. Test new Custom Dynamics® front turn signals for proper operation.



Please read all Information below before Installation

**Warning:** Disconnect negative battery cable from battery; refer to owner's manual. Failure to do so may result in electrical shock, injury, or fire. Secure negative battery cable away from positive side of battery and all other positive voltage sources on motorcycle.

**Safety First:** Always wear appropriate safety gear including safety glasses when performing any electrical work. It is highly recommended that safety glasses be worn throughout this installation process. Be sure motorcycle is on level surface, secure and cool.

**Cleaning:** Take special care in cleaning the finish. Never use abrasive polishes or cleaners as these can scratch and/or damage the finish. Avoid power washing/applying direct stream to aftermarket parts.

Questions? Email: [info@CustomDynamics.com](mailto:info@CustomDynamics.com) or Call us at: 1 (800) 382-1388 M-TH 8:30AM-5:30PM / FR 9:30AM-5:30PM EST