



## Custom Dynamics® Tour-Pak Speaker Power Harness Installation Instructions

We thank you for purchasing the Custom Dynamics® Tour-Pak Speaker Power Harness. Our products utilize the latest technology and high quality components to ensure you the most reliable service. We offer one of the best warranty programs in the industry and we back our products with excellent customer support, if you have questions before or during installation of this product please call Custom Dynamics® at 1(800) 382-1388.

**Part Numbers:** CD-TP-HARN-2

**Package Contents:**

- Tour-Pak Speaker Power Harness (1)

**Fits:** 2014-2023 Harley-Davidson® Street Glide (FLHX), Street Glide Special (FLHXS), 2015-2023 Road Glide (FLTRX), Road Glide Special (FLTRXS), 2022-2023 Street Glide ST (FLHXST) & Road Glide ST (FLTRXST) and 2019-2022 Electra Glide Standard (FLHT).

**NOTE:** The Radio may need to be flashed to enable the Radio Rear Speaker Output for the Tour-Pak speakers to function.



### Installation:

1. Remove the seat and disconnect the negative battery cable from the battery.
2. Remove the front fairing from the motorcycle. Refer to the factory service manual for fairing removal.
3. With the fairing removed, locate the Black 4 pin Audio connector. On most models it is located in front of the radio. Refer to Photo 1.
4. Plug the Tour-Pak Speaker Power Harness into the factory Black 4 pin connector.
5. Route the Tour-Pak Speaker Power Harness out the back of the fairing and under the tank to the rear Tour-Pak speaker 16 pin connector. Use the bike main wiring harness as a harness routing guide.
6. Secure the Tour-Pak Speaker Power Harness to prevent damage to the harness. Make sure the harness will not come in contact with moving or high heat parts. Take precautions so the harness will not get pinched or frayed when the seat is installed.
7. Reconnect the negative battery cable to the battery and test for proper audio operation of the rear Tour-Pak speakers.
8. Reinstall the front fairing per the factory service manual.
9. Reinstall the seat.
10. Test all lighting and audio for proper operation.




## ATTENTION

Please read all Information below before Installation

**Warning:** Disconnect negative battery cable from battery; refer to owner's manual. Failure to do so may result in electrical shock, injury, or fire. Secure negative battery cable away from positive side of battery and all other positive voltage sources on vehicle.

**Safety First:** Always wear appropriate safety gear including safety glasses when performing any electrical work. It is highly recommended that safety glasses be worn throughout this installation process. Be sure vehicle is on level surface, secure and cool.

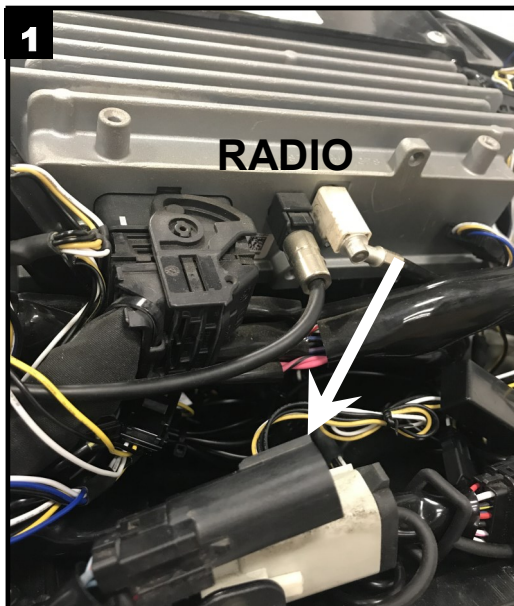

### Harness Wire Designation

Left Speaker (+): Orange  
Left Speaker (-): Grey  
Right Speaker (+): Blue  
Right Speaker (-): Black